

**DRI150**



DRI150 with imported motor from Netherland, greatly increase the stability of the operator.  
High density spring allow the door close even without power supply.

**Technical data:**

Dim((W*H*D)	530*100*104mm
Weight(include standard arm)	11.3kg
Max. Door weight	180kg
Hold open time	1-305 adjustable
Opening & closing speed	30-100% adjustable
Opening angle	70-95°
Working temperature	-15℃-70℃
Protection class	IP21, suggest for indoor use
Input voltage	AC110V/230V,13A

**Function**

**Working mode by BEDIS**

- Automatic ●
- Manual ●
- Hold open ●
- Exit mode ●
- Lock ●
- Display of error code ●

**Key components**



**Optional function**

- Increased closing force ○
- Push & go function ○
- Adjustable opening angle ○
- Manual or lock mode(by BEDIS) ○
- Double leaf close in sequence ○
- Button control(close/open) ○
- Exit(by BEDIS) ○

●: standard function ○: optional function —: no function

**DRW100**



Disabled keypad

Function remote

Wired push button

**Swing door technical datas**


Dim((W*H*D)	<b>475*81*98mm</b>
Weight(include standard arm)	5.5kg
Max. Door weight	120kg
Hold open time	0-20s adjustable
Opening & closing speed	45°/s adjustable
Opening angle	110°
Working temperature	-20℃-+55℃
Protection class	IP21, suggest for indoor use
Input voltage	AC100V-240V

**Single open**

**Double open**

Door width	500mm-1200mm
Door weight	100kgs(max)
Opening speed	3-10s(adjustable)
Closing speed	3-10s(adjustable)
Closing buffering function	yes
Opening buffering function	yes
Anti-collision function when open	yes
Anti-collision function when Close	yes

DRW200

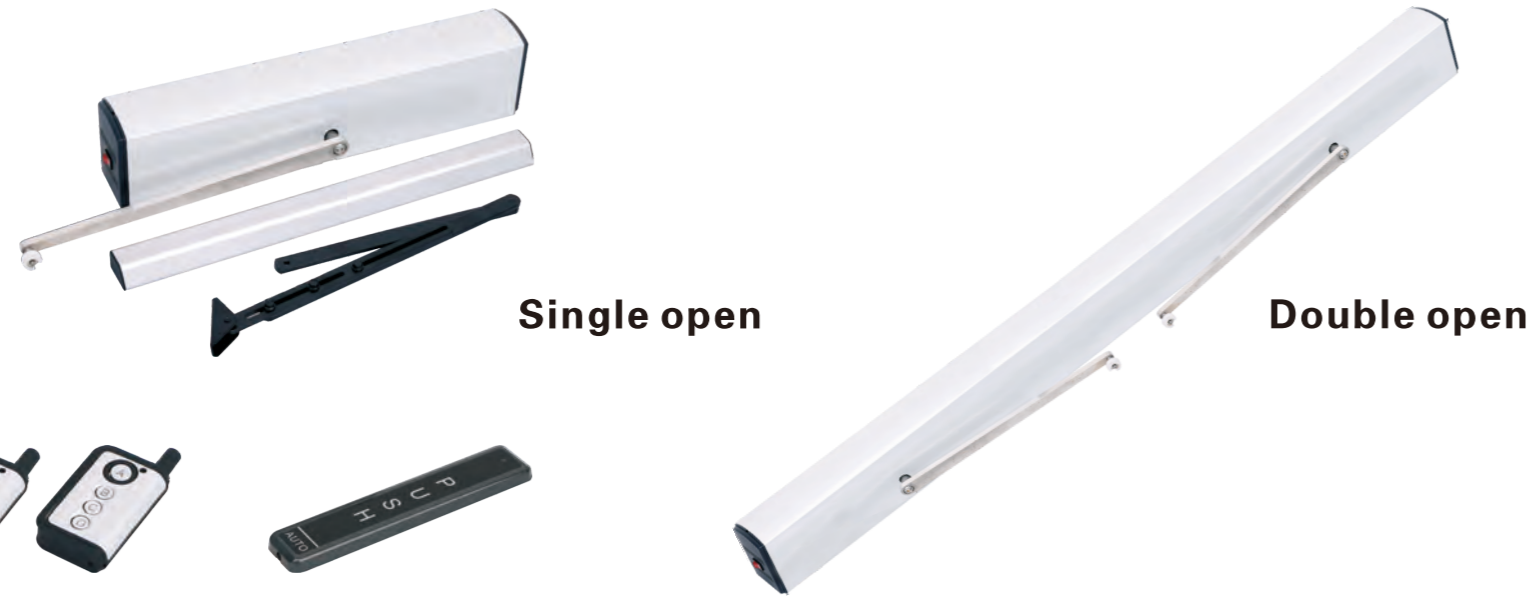

Single open

Double open



Disabled keypad



Function remote



Wired push button

Swing door technical datas

Dim((W*H*D)	518*81*115mm	Door width	500mm-1500mm
Weight(include standard arm)	6kg	Door weight	200kgs(max)
Max. Door weight	200kg	Opening speed	3-10s(adjustable)
Hold open time	0-20s adjustable	Closing speed	3-10s(adjustable)
Opening & closing speed	45°/s adjustable	Closing buffering function	yes
Opening angle	115°	Opening buffering function	yes
Input voltage	AC100V-240V	Anti-collision function when open	yes
Protection class	IP21, suggest for indoor use	Anti-collision function when Close	yes
Working temperature	-20°C-+55°C	Push open function	yes
Open time	0-60s (adjustable)		
Output	24V DC ±10%, 3A		

DRW350



Disabled keypad



Function remote



Wired push button

Swing door technical datas

Dim((W*H*D)	606*90*128mm(W*H*D)	Door width	700-1400mm
Power	Standby 13W, Rated 87W	Opening speed	3-9s adjustable
Opening angle	45° -95° adjustable	Closing speed	3-9s adjustable
Hold time	0-30s adjustable	Spring close	Yes
Voltage	110V/220V	Full energy mode	Yes
Max. torque	50Nm	Low energy mode	Yes
Noise	18dB	Opening/Closing speed	3-9s adjustable
Max door weight	350kg		